

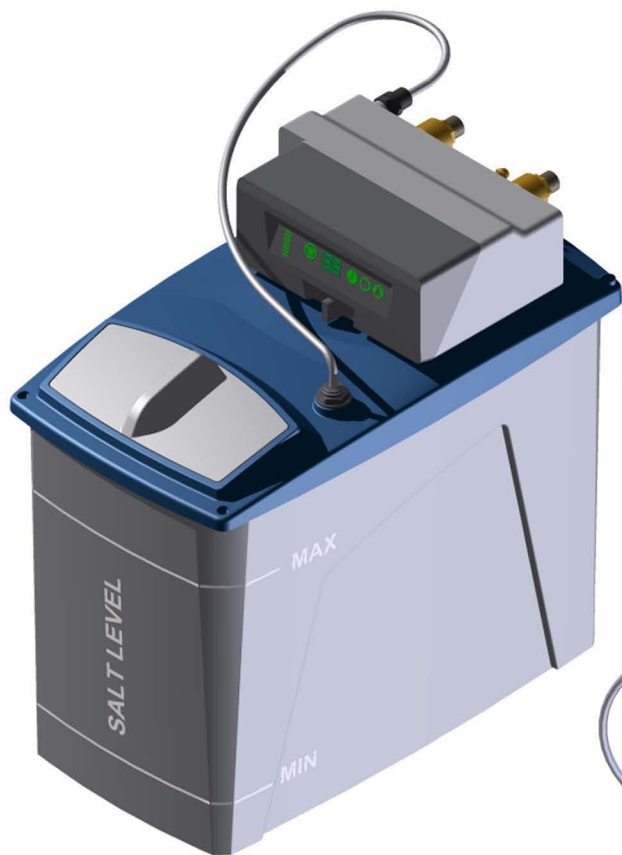


automatic water softener

ISI8

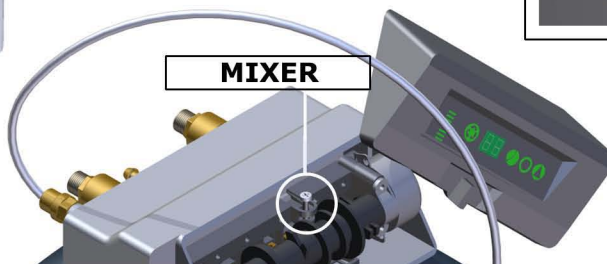

WATER NETWORK CONNECTIONS

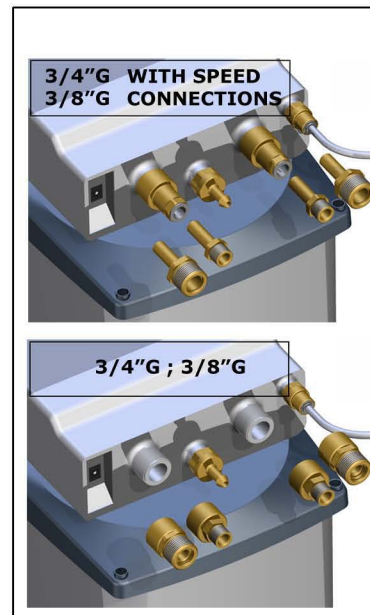

1 WATER SOFTENER CONSISTING OF:

- 1 brine tank
- 1 Autotrol 366/604 valve
- 1 steel AISI 304 cylinder holding 5.6 litres of cationic resins adapt for softening
- 1 instruction manual
- 4 m of unloading pipe
- 1 overflow curved union joint
- 1 fittings kit for water network connection

THE WATER SOFTENER IS SUITED FOR:

- coffee machines and glasswashers
- glasswashers
- dishwashers
- convection ovens
- ice makers

PRODUCT CODE:

- AAS07 with connections 3/4" G
- AAS08 with connections 3/8" G
- AAS09 with fast connections Ø12 mm
- AAS10 with fast connections and 3/8" G speed fit
- AAS11 with fast connections and 3/4" G speed fit

TECHNICAL DATA

Width 245 mm
 Height 440 mm
 Depth 450 mm
 Weight 12 Kg
 Power supply 230V 50/60 Hz standard
 120V 60 Hz optional
 Maximum flow rate 1500 l/h
 Room temperature 4°-30°C
 Power requirement 6 W
 Water network connections:
 3/4" G ; 3/8" G; fast connections Ø12 mm
 Regeneration salt amount: 1.0 Kg
 Maximum salt content in the brine tank: 20 kg

SUPPLY WATER CHARACTERISTICS

Drinking water
 Temperature: min 4°C-max 25°C
 Pressure: min 2 bar, max 8 bar
 Crystal-clear water (SDI 1)
 Maximum hardness: 90 °f

Litres of softened water according to its hardness

WATER HARDNESS	20°f 11°d 200 ppm CaCO ₃	30°f 16°d 300 ppm CaCO ₃	40°f 22°d 400 ppm CaCO ₃	50°f 28°d 500 ppm CaCO ₃	60°f 33°d 600 ppm CaCO ₃
softened litres	1680	1120	840	672	560

cycle capacity : 33.5 m³ °f